


Wideband DWDM Mux/DeMux for Bi-Directional transceiver

Benefit

- Wide passband that is applicable for Bi-Di transceiver



Parameter	Value
Passband	Center wavelength \pm 30GHz
Insertion Loss	\leq 2.3dB
Link IL (Mux&Demux)	\leq 3.8dB
Isolation	\geq 30dB
Size	29 x 130 x 102mm * Protruding parts not included
Operating temperature	-30 ~ 70 °C
Center wavelength	ITU-T grid compliant

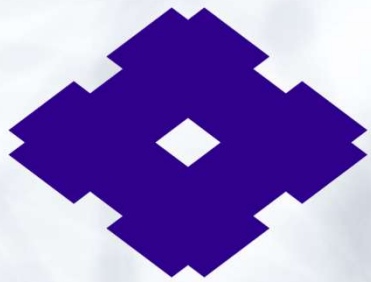

SUMITOMO ELECTRIC

http://www.global-sei.com/fiber_optic_interconnect/products/Passive_Component
interconnect@info.sei.co.jp

All the information are subjected to be changed without prior notice.